



PKR 261, metal sealed, DN 25 ISO-KF






Similar Image

PKR 261, metal sealed, DN 25 ISO-KF

- FullRange® gauge with two sensors in one housing
- Display range from $5 \cdot 10^{-9}$ to 1000 hPa
- Flange size: DN 25 ISO-KF
- Maximum pressure refers to inert gases and temperatures of less than 55 °C
- Corrosion-resistant

Dimensions

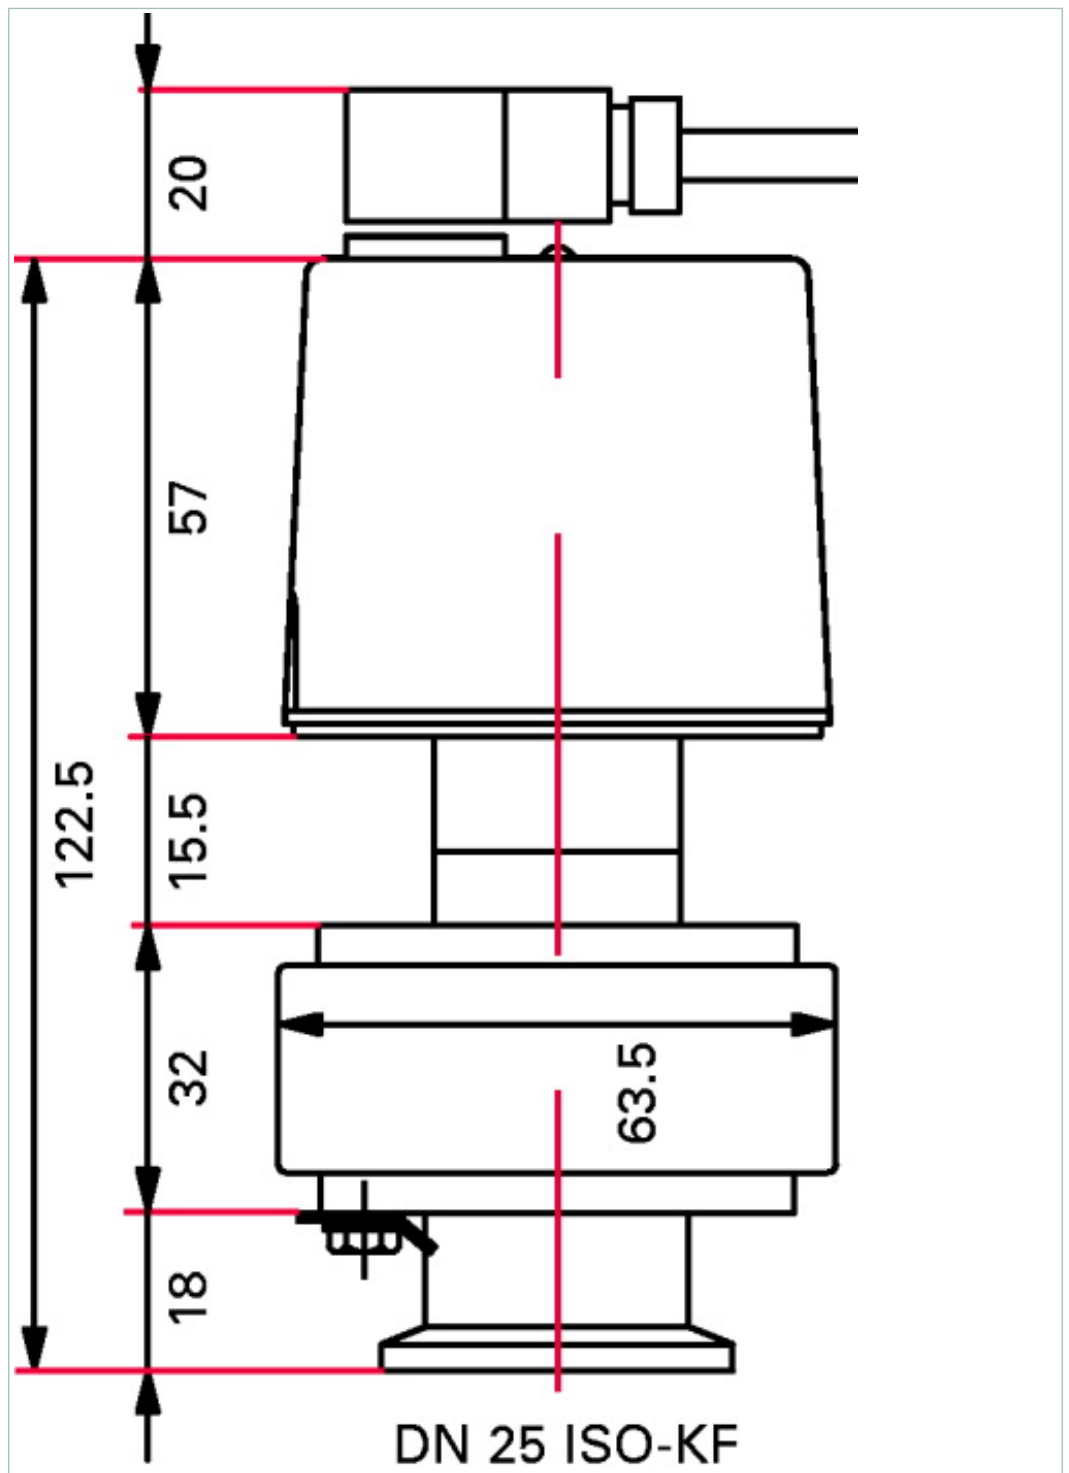

Technical Data	PKR 261, metal sealed, DN 25 ISO-KF
Accuracy: 10^{-8} - 10^2 hPa	$\pm 30\%$
Anode	Molybdenum
Bakeout temperature	Electronic removed, $\leq 150\text{ }^{\circ}\text{C}$ Electronic removed, $\leq 302\text{ }^{\circ}\text{F}$ Electronic removed, $\leq 423\text{ K}$
Feature	Metal sealed
Feedthrough	Al_2O_3 , Glas
Filament	Tungsten
Flange	Stainless steel
Measurement range max.	1,000 hPa 750 Torr 1,000 mbar
Measurement range min.	$5 \cdot 10^{-9}$ hPa $3.75 \cdot 10^{-9}$ Torr $5 \cdot 10^{-9}$ mbar
Method of measurement	Pirani/Cold Cathode
Nominal diameter	DN 25 ISO-KF
Output signal: Minimum load	10 k Ω
Output signal: Pressure range	1.8 - 8.6 V
Output signal: Sensor error above	9.5 V
Output signal: Sensor error below	0.5 V
Pressure max.	10,000 hPa 7,500 Torr 10,000 mbar
Repeatability: 10^{-8} - 10^2 hPa	$\pm 5\%$
Seal	Ag, Cu
Sensor cable length	300 m
Supply: Power consumption max.	2 W
Supply: Voltage	15-30 V DC
Temperature: Operating	5-55 $^{\circ}\text{C}$ *
Temperature: Storage	-40-65 $^{\circ}\text{C}$ -40-149 $^{\circ}\text{F}$ 233-338 K
Volume	20 cm^3
Weight	700 g

* Operating temperature: up to 150 $^{\circ}\text{C}$ at the flange if mounted horizontally

Order number
PKR 261
PT R26 250

Accessories
Accessory for ActiveLine gauges and controllers
Mating connector
Sensor cable, 3 m
B 4707 283 MA
PT 448 250 -T