



**TPR 280, 80 °C, DN 16 CF-R**






Similar Image

## TPR 280, 80 °C, DN 16 CF-R

- Responsive measurement
- Display range  $5 \cdot 10^{-4}$  to 1000 hPa
- Flange size: DN 16 CF-R
- For general vacuum applications
- Compact and rugged
- Maximum pressure refers to inert gases

### Dimensions

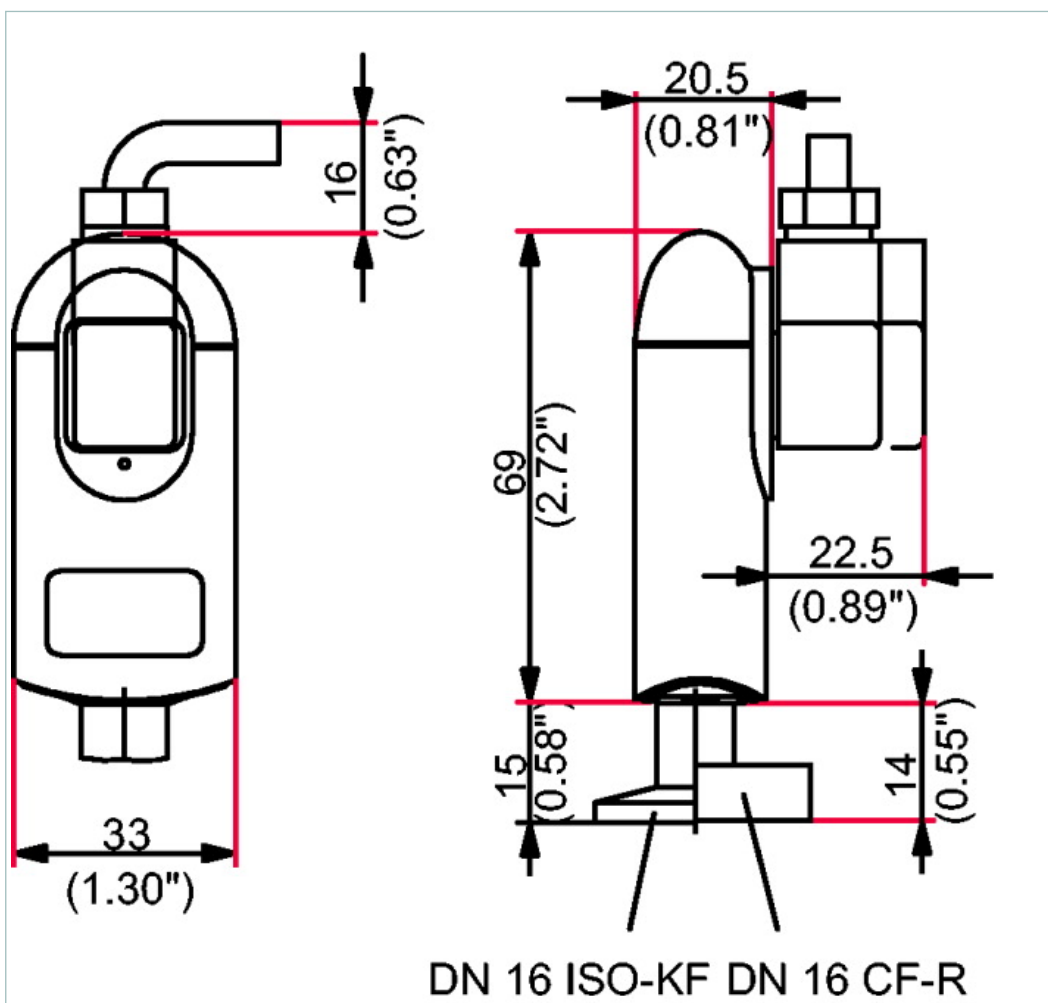

Technical Data	TPR 280, 80 °C, DN 16 CF-R
Accuracy: $10^{-3}$ - $10^2$ hPa	$\pm 15$ %
Bakeout temperature	80 °C   176 °F   353 K
Feature	Stainless steel, metal sealed
Feedthrough	Glass
Filament	Tungsten
Flange	Stainless steel
Measurement range max.	1,000 hPa   750 Torr   1,000 mbar
Measurement range min.	$5 \cdot 10^{-4}$ hPa   $3.75 \cdot 10^{-4}$ Torr   $5 \cdot 10^{-4}$ mbar
Method of measurement	Pirani
Nominal diameter	DN 16 CF-R

Technical Data	TPR 280, 80 °C, DN 16 CF-R
Output signal: Minimum load	10 kΩ
Output signal: Pressure range	2.2 - 8.5 V
Output signal: Sensor error below	0.5 V
Pressure max.	10,000 hPa   7,500 Torr   10,000 mbar
Protection category	IP40
Repeatability: 10 <sup>-3</sup> - 10 <sup>2</sup> hPa	± 2 %
Resolution	1 % of reading
Response time	80 ms
Seal	Metal
Sensor cable length max.	200 m
Supply: Power consumption max.	1 W
Supply: Voltage	14-30 V DC
Temperature: Operating	5-60 °C   41-140 °F   278-333 K
Temperature: Storage	-20-65 °C   -4-149 °F   253-338 K
Volume	1.5 cm <sup>3</sup>
Weight	100 g

Order number	
TPR 280	PT R26 951

Accessories	
<b>Accessory for ActiveLine gauges and controllers</b>	
Mating connector	B 4707 283 MA
Sensor cable, 3 m	PT 448 250 -T